



Dell e6400 keyboard Netbook Replacement

Follow the guide to replace the keyboard if sian not working

Written By: Smilzo




Step 1 — Keyboard



- remove battery

Step 2

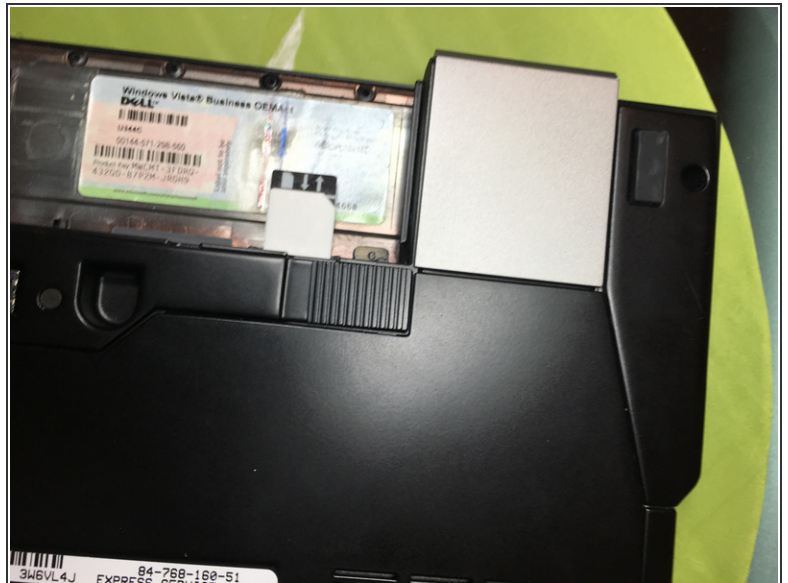




- Remove the card from the slot by pulling the tab
- Relying on plastic hooks disengages the front of the line at the top of keys giving access to the keyboard retaining screws

Step 3



- Pry below to extract the line of the upper keys

Step 4

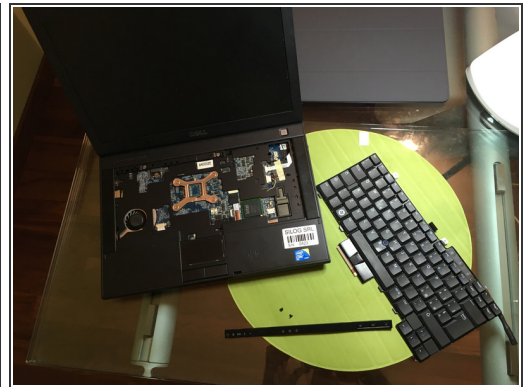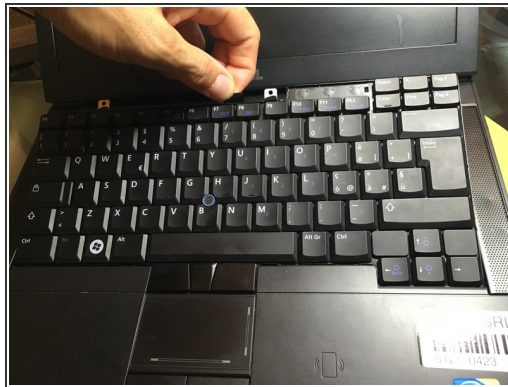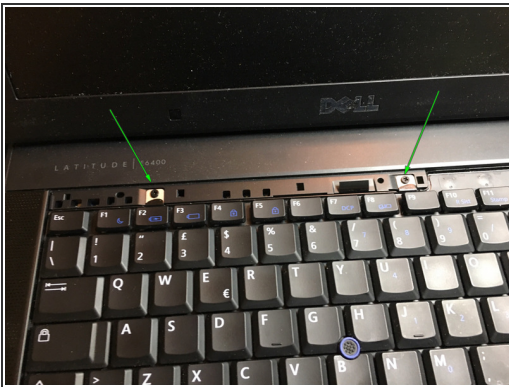

- Unscrew the two Phillips screws that hold the keyboard attached to the notebook body
- New riga. itilizzare the black tab to pull back and towards each other to unhook the keyboard

Per rimontare il dispositivo, segui queste istruzioni in ordine inverso.

This document was last generated on 2017-06-17 09:37:51 AM.